

65025

HIGH RELIABILITY HALL EFFECT SENSOR, LATCHING OUTPUT



07/22/2009

Features:

- Wide operating temperature range -55°C to +200°C
- High magnetic sensitivity
- Low current CMOS Technology
- Wide operating voltage range 3.5 to 20 V
- Chopper stabilized amplifier minimizes amplifier offset resulting in improved temperature stability

Applications:

- Solid state switch
- Motor controls
- Speed sensing
- Angular Position sensing
- Linear Position Sensing
- Current Sensing


DESCRIPTION

The 65025 Hall effect sensor detects the presence of a magnetic field and provides a switch output. It is packaged in a hermetically sealed three pin ceramic package and can be used in many harsh environments. An internal chopper stabilized amplifier eliminates input offset voltages normally associated with bipolar devices resulting in improved operating point stability. The output transistor will be "latched ON" in the presence of a sufficiently strong South pole magnetic field facing the marked side of the package. The output will be "latched OFF" in the presence of a resetting North pole magnetic field.

ABSOLUTE MAXIMUM RATINGS


Supply Voltage Range	3.5 V to 20.0 V
Supply Current (Fault)	50 mA
Power Dissipation, @ T _A = 25°C (P _D)	500 mW
Magnetic Flux Density	Unlimited
Output ON Current (I _{SINK})	.25 mA
Storage Temperature	-65°C to +200°C
Operating Free-Air Temperature Range	-55°C to +200°C
Lead temperature (10 seconds, 1/16" from case)	+260°C

Package Dimensions

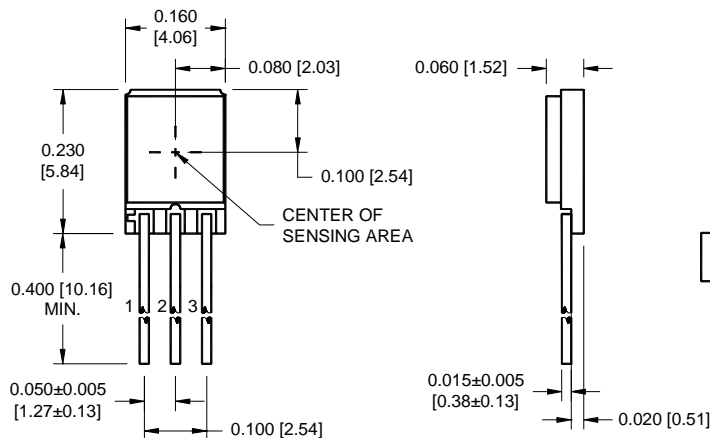

TOLERANCE: ±0.010 [±0.25] UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]

Schematic Diagram

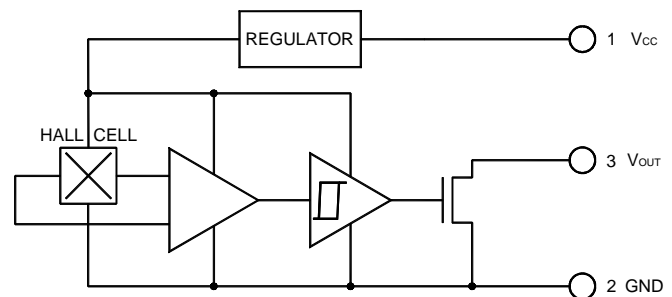

65025

07/22/2009

HIGH RELIABILITY HALL EFFECT SENSOR, LATCHING OUTPUT

ELECTRICAL CHARACTERISTICS

T_A = 25°C, V_{CC} = 5 V unless otherwise specified.

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Supply Current	I _{CC}	1.5	2.5	7.0	mA	V _{CC} =15V; B < B _{OP}
Saturation Voltage	V _{OL}			0.5	V	I _{OUT} = 20 mA, B > B _{OP}
Output Leakage	I _{OFF}		0.01	5	μA	B < B _{OP} , V _{OUT} = 15 V
Output Rise Time	T _r		0.25	1	μs	V _{CC} = 12V, R _L = 1 KΩ, C _L = 20 pF
Output Fall Time	T _f		0.25	1	μs	V _{CC} = 12V, R _L = 1 KΩ, C _L = 20 pF
Maximum Switching Frequency	F _{SW}			10	KHz	

MAGNETIC CHARACTERISTICS

T_a = 25°C, V_{CC} = 5 V unless otherwise specified.

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Operate Point	B _{OP}	10	75	150	Gauss	V _{CC} = 5 V, R _L = 1 KΩ
Release Point	B _{RP}	-100	-50	-10	Gauss	V _{CC} = 5 V, R _L = 1 KΩ
Hysteresis	B _{HYS}	70	100	120	Gauss	V _{CC} = 5 V, R _L = 1 KΩ

NOTES:

1. Extended temperature performance is obtained with ceramic packaging and assembly processes. High temperature testing is functional switching verification using an applied field of greater than 200 G to latch the output on and an applied field of greater than -200 G to reset output off.

ORDERING INFORMATION:

PART NUMBER	DESCRIPTION
65025-001	Commercial
65025-101	Screened