

APR24-3G Rectifier Module



Contents


Description	Page
AC Input.....	2
DC Output.....	3
Environmental Requirements.....	3
Mechanical.....	3
Compliances.....	4
Certifications.....	4




Powering Business Worldwide

AC Input


Nominal AC Input:	100V, 120V, 208 - 240V
Rated Operating Ranges:	90 to 275V rms <i>Reduced output power below 175 V (see derating curves)</i>
Extended Operating Range:	85 to 300V rms
Frequency Range:	45 to 66Hz
Maximum Input Current:	9.5A rms (175V AC, 20°C)
Efficiency:	90% peak >89% (50 to 100% load, 230Vac)
Power Factor:	>0.98 (50 to 100% load)
Total Harmonic Distortion (THD):	<5% (50 to 100% load, rated 230V ac voltage)
Swell Tolerance:	Rectifier shuts down above 320V <i>Returns to normal operation when input is within operating range.</i>
Input Over-current Protection:	Fuses (phase and neutral) HRC
AC Fuse Ratings:	16A / 250V

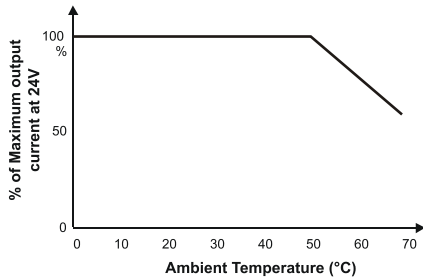

Output current derating with temperature
(AC Input voltage > 175V)

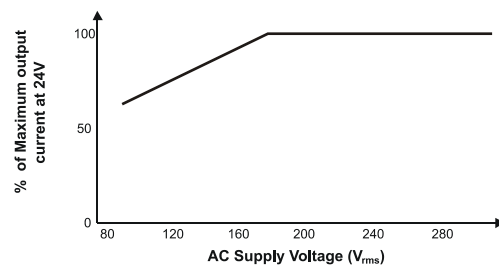

Output current derating with AC input voltage
(Ambient temperature ≤ 50°C)

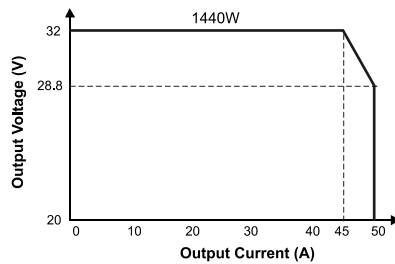

Output Power/Current Characteristic

DC Output

Nominal Voltage:	24V
Adjustable Voltage Range:	21.5 to 32V
Rated Output Power:	1440W
Rated Output Current:	50A @ 28.8V (Constant current)
Preset Accuracy	±0.1V
Regulation:	±0.1V <i>Constant voltage mode, AVC enabled from system controller.</i>
Default (Fail-safe) voltages	
Loss of System Communication:	Output voltage resets to system preset voltage
Preset voltage:	27.25 ±0.1V (manufacturer preset)
Hold-up Time:	>21ms <i>At 80% output power and 230V ac the DC output voltage change is 27.25V to 21.74V.</i>
Start-up time:	Soft start
Protection	
Current Limit:	Factory set to 50A
Over Temperature Turndown:	Automatic power turndown. See temperature derating graphs.
Over Voltage Shutdown:	<3ms delay
Short-circuit:	Full short-circuit protection. Output current limited to less than 130% of rated output current. <i>Rectifier will continue normal operation after short-circuit is removed. Non-urgent (Current Limit) alarm generated.</i>
Noise under nominal conditions	
Ripple (<100Hz)	<10mV rms (unweighted)
Audio Frequency (300Hz – 3.4kHz):	<2mV (psophometric)
Wide band (5Hz – 1MHz):	<10mV rms (unweighted)
Peak to peak (0 – 20 kHz):	<200mV p-p (unweighted)
Discrete frequency (3.4kHz – 150kHz):	<5mV rms (1kHz wide selective frequency)

Environmental Requirements

Ambient Temperature	
Rated Operating Range:	-10°C to +50°C [14°F to 122°F]
Extended Operating Range:	-40°C to +70°C [-40°F to 158°F] <i>Output characteristics derate above 50°C and below -10°C [14°F]. Refer to derating graphs.</i>
Humidity	
Nominal:	50% RH
Range:	< 95% RH (non condensing)
Altitude:	< 3000m [9800 feet] <i>Output power derates above 2000m [6500 feet].</i>

Mechanical

Dimensions H, W, D:	3U (130mm, 5.1"), 42mm (1.6"), 266mm (10.5") overall
Weight:	1.7kg [3.7lb]
Connector:	PCB Edge
Cooling:	Temperature controlled, high reliability fans
Front panel LEDs:	
Power on:	Green
Minor alarm:	Amber
Major alarm:	Red

Compliances

Safety:	AS/NZS 60950, UL 60950, IEC 60950
EMC – immunity	
Electrostatic discharge:	EN 61000-4-2
Radiated radio frequency:	EN 61000-4-3
Electrical fast transients:	EN 61000-4-4
Surge:	EN 61000-4-5
Conducted radio frequency:	EN 61000-4-6
Dips, interruptions & variations:	EN 61000-4-11
EMC – emissions	
Conducted emissions (AC):	EN 55022 / CISPR 22 (Class B)
Conducted emissions (DC):	EN 300 386 (Class A)
Radiated emissions:	EN 55022 / CISPR 22 (Class B)
Harmonics:	EN 61000-3-2
Fluctuations and flicker:	EN 61000-3-3

Certifications

Europe	CE-mark
USA	UL and FCC
Canada	cUL and IC
China	MII
Australia / New Zealand	C-tick

© Eaton Corporation. All Rights Reserved. In the interests of continual product improvement all specifications are subject to change without notice. Performance ratings are valid with all other variables at Nominal. Specifications guaranteed over rated operating range. Eaton, Powerware, Intergy, CellSure, SiteSure, DCTools and PowerManager are trade names, trademarks, and/or service marks of Eaton Corporation or its subsidiaries and affiliates. All other marks are the property of their respective owners.