

APR48-3G Rectifier Module



Contents


Description	Page
AC Input	2
DC Output	3
Environmental Requirements	3
Mechanical	3
Compliances	4
Certifications.....	4




Powering Business Worldwide

AC Input

Nominal AC Input:	100V, 120V, 208 - 240V
Rated Operating Range:	90 to 275V rms <i>Reduced output power below 175V (see derating curves).</i>
Extended Operating Range:	85 to 300V rms
Frequency Range:	45 to 66Hz
Maximum Input Current:	11.5A rms (175Vac, 20°C)
Efficiency:	92% peak >91.5% (50 to 100% load, 230Vac)
Power Factor:	>0.99 (50 to 100% load)
Total Harmonic Distortion (THD):	<5% (50 to 100% load, rated 230V ac voltage)
Swell Tolerance:	Rectifier shuts down above 320V <i>Returns to normal operation when input is within operating range.</i>
Input Over-current Protection:	Fuses (phase and neutral) HRC
AC Fuse Ratings:	16A / 250V

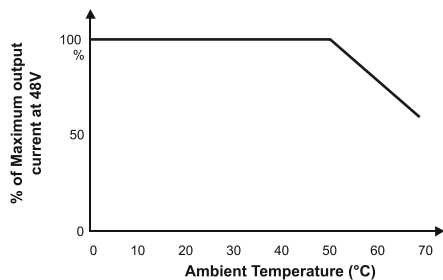

**Output current derating with Temperature
(AC Input voltage > 175V)**

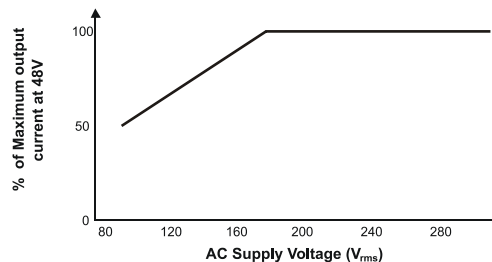

**Output current derating with AC input voltage
(Ambient temperature ≤ 50°C)**

DC Output

Nominal Voltage:	48V
Adjustable Voltage Range:	43 to 57.5V <i>Constant power output characteristic 48 – 57.5V.</i>
Rated Output Power:	1800W @ 175 – 275V ac (240V nominal) 1100W @ 110 – 120V ac (120V nominal)
Preset Accuracy	±0.1V
Regulation:	±0.1V <i>Constant voltage mode, AVC enabled from system controller.</i>
Default (Fail-safe) voltages Loss of System Communication: Preset voltage:	Output voltage resets to system preset voltage 54.5 ±0.1V (manufacturer preset)
Hold-up Time:	12ms <i>At 80% output power and 230V ac the DC output voltage change is 54.5V to 43V.</i>
Start-up time:	Soft start
Protection Current Limit: Over Temperature Turndown: Over Voltage Shutdown: Short-circuit:	Factory set to 37.5A Automatic power turndown. See temperature derating graphs. <3ms delay Full short-circuit protection. Output current limited to less than 130% of rated output current. <i>Rectifier will continue normal operation after short-circuit is removed. Non-urgent (Current Limit) alarm generated.</i>
Noise under nominal conditions Ripple (<100Hz) Audio Frequency (300 Hz – 3.4 kHz): Wide band (5Hz – 1MHz): Peak to peak (0 – 20 MHz): Discrete frequency (3.4kHz – 150kHz):	<10mV rms (unweighted) <2mV (psophometric) <10mV rms (unweighted) <200mV p-p (unweighted) <5mV rms (1kHz wide selective frequency)

Environmental Requirements

Ambient Temperature Rated Operating Range: Extended Operating Range:	-10°C to +50°C [14°F to 122°F] -40°C to +70°C [-40°F to 158°F] <i>Output characteristics derate above 50°C and below -10°C [14°F]. Refer to derating graphs.</i>
Humidity Nominal: Range:	50% RH < 95% RH (non condensing)
Altitude:	< 3000m [9800']

Mechanical

Dimensions H, W, D:	3U (130mm, 5.1"), 42mm (1.6"), 266mm (10.5") overall
Weight:	1.7kg [3.7 lb]
Connector:	PCB Edge
Cooling:	Temperature controlled, high reliability fans
Front panel LEDs: Power on: Minor alarm: Major alarm:	Green Amber Red

Compliances

Safety:	AS/NZS 60950.1, UL 60950-1, IEC 60950-1
EMC – immunity	
Electrostatic discharge:	EN 61000-4-2
Radiated radio frequency:	EN 61000-4-3
Electrical fast transients:	EN 61000-4-4
Surge:	EN 61000-4-5
Conducted radio frequency:	EN 61000-4-6
Dips, interruptions & variations:	EN 61000-4-11
EMC – emissions	
Conducted emissions (AC):	EN 55022 / CISPR 22 (Class B)
Conducted emissions (DC):	EN 300 386 (Class A)
Radiated emissions:	EN 55022 / CISPR 22 (Class B)
Harmonics:	EN 61000-3-2
Fluctuations and flicker:	EN 61000-3-3

Certifications

Europe	CE-mark
USA	UL and FCC
Canada	cUL and IC
China	MII
Australia / New Zealand	C-tick

© Eaton Corporation. All Rights Reserved. In the interests of continual product improvement all specifications are subject to change without notice. Performance ratings are valid with all other variables at Nominal. Specifications guaranteed over rated operating range. Eaton, Powerware, Intergy, CellSure, SiteSure, DCTools and PowerManager are trade names, trademarks, and/or service marks of Eaton Corporation or its subsidiaries and affiliates. All other marks are the property of their respective owners.