

3G Enterprise Power Solutions - EPS5 Series



The **Eaton® 3G Enterprise Power Solutions** are the ideal solution for converged data networks and low power tele-communications applications requiring compact, efficient and flexible DC power supplies.

The EPS5 series is a 19" rack mounted system and is available with up to five of the Eaton 48V 3G Enterprise power rectifier modules, providing a total output of up to 4500W. The modular design of the system allows users to simply add additional rectifiers and batteries as required to meet future growth of their network power demand, thus, better protecting the initial power system investment.

The versatile SC200 system controller features a front access USB port for ease of system setup along with a

RS232 rear port and a 10BaseT Ethernet port for remote networking and communications.

Communication features of the SC200 system controller include TCP/IP, SNMP and an onboard web server allowing access with standard web browsers.

The Enterprise systems include an integral DC distribution panel with easy to fit push-in circuit breakers and low voltage disconnect contactor to prevent over discharging of the optional backup batteries.

Typical applications include providing secure power for customer premises equipment, roadside cabinets, converged VoIP/data networks, PoE, IP routers and small PABX's.

Features

- 19" rack mounting
- High power density
- Intelligent system controls
- Pre-configured software
- Onboard secure web server
- Push-in easy to fit circuit breakers
- Low voltage disconnect
- Fast on-line expansion of rectifiers (hot-swap)
- High efficiency and unity power factor
- Easy to use menu & full color display
- Optional batteries



Powering Business Worldwide

Technical Specifications

Input	
AC Supply	Nominal: 120V, 240V Operating range: 90V – 275V
Power Factor †	>0.99 (50 – 100% output current)
Efficiency †	91% (50 – 100% output current)

Output	
DC Output Voltage Range	43 – 57.5V
DC Output Power (maximum*) †	240V AC: 4.5kW 120V AC: 2.25kW
* Based on five rectifiers fitted, refer to EPR48-3G rectifier data sheets.	

Environmental	
Operating Temperature Range	Rated: -10°C to +50°C [-14°F to +122°F] Extended*: -40°C to +70°C [-40°F to +158°F]
*Output current is derated above 50°C [122°F]	

Mechanical	
Dimensions H,W,D	3U, 19" mounting, 13.2" [335mm]*
* Additional clear depth space is required for exhaust air.	

System	
System Controller	SC200
DC Distribution Module	12-way circuit breakers (2 x battery, 10 x load) Circuit breaker type: magnetic/hydraulic, push fit Battery circuit breakers: Heinemann AC1R Series Typical ranges available: 30A, 40A, 50A, 60A, 70A Load circuit breakers: Heinemann JC1S Series Typical ranges available: 6A, 10A, 15A, 20A, 25A, 30A
Communication Features	USB direct 10BaseT Ethernet, TCP/IP, SNMP, Modbus-TCP, Modbus-RTU and on board web server RS232 to external PSTN or GSM modem (modem not included)
Rectifier Blank Panels	For unused rectifier positions


Software	
DCTools	Configuration software. Free download from: www.powerware.com/downloads
PowerManagerII	Remote control and monitoring software

† Power factor, efficiency and DC output power are dependant on rectifier model fitted. Refer to the rectifier data sheet for further details.

Options	
Battery*	Eaton Extended Battery Module (EBM) 5PX version - 5PXEBM48RT (available globally) 5130 version - 103006587-6591 (EMEA only)

Weight: 29.5kg [65lb]
Dimensions (H,W,D*): 85mm (2U), 432mm (19" mounting), 487mm
*Additional space is required at the rear for cables.

Typical run time values* (see graph).

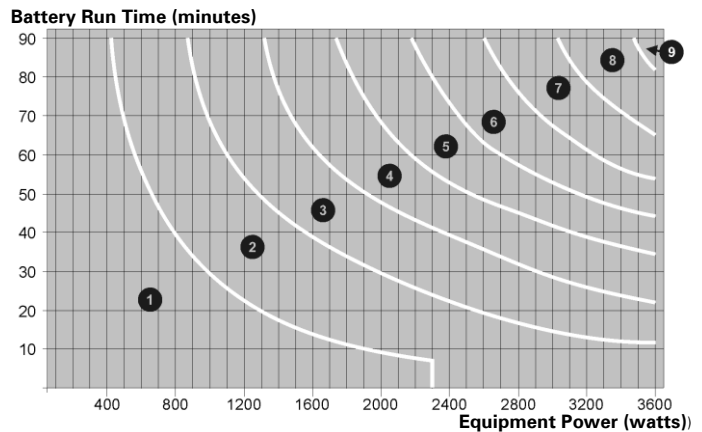

● = Required number of battery modules.

*Battery times are approximate and vary depending on factors such as:
- load configuration
- battery charge
- battery age and temperature.

* Other battery options available - consult your local Eaton agent.

Battery Cables	CKBATT-02 Eaton EBM 5130 connection cable, 2000mm long. or CKBATT-01 'other batteries' connection cable, 2000mm long.
Equipment Cable	Customer equipment connection cable CKLOAD-00 10-way connection loom, 1000mm long
EBM Rack Mounting Kit	Included with the EBM as standard

Certifications
All products comply with international standards.

North America	UL (Canada, USA), FCC Class B
Europe	CE
Australia and New Zealand	C-Tick

In the interests of continual product improvement all specifications are subject to change without notice.

