

## **NBS3000X04SXX SMT Non-Isolated Point-of-Load Converters**

### **18V – 36V input, 5V-15.5V 3.5A/24W output**



RoHS Compliant Parts Available

#### **Features**

- High efficiency, 94% (24Vin, 12Vout@2A)
- Excellent thermal performance
- High output current/Power: 3.5A/24W
- High input-voltage range: 18 - 36V
- Wide output-voltage range: 5V to 15.5V
- Monotonic start-up into pre-biased load
- Remote enable control
- Small footprint: 1.1" x 0.45" x 0.25"
- All components meet UL 94V0

#### **Applications**

- Intermediate bus architecture
- Telecom, datacom, networking equipment
- Electronic data processing, servers
- Distributed power architectures

#### **Options**

- Negative/Positive enable logic
- Output voltage tracking/Sequence

This *NBS Series* non-isolated point-of-load (POL) dc-dc converters deliver up to 3.5A of current in industry-standard SMT packages with high efficiency and unparalleled thermal performance. The *NBS* converters provide competitive cost, high performance, high reliability and quality, and flexibility of use in a wide range of applications. The open frame design with integrated magnetics has a low profile (0.25"), achieving industry-leading power density and enhanced airflow for nearby components. As a benefit of the high efficiency and resulting superior thermal performance, these converters can provide high output currents in challenging environments with simple thermal management. These converters provide input under-voltage lockout, wide output voltage trim, overload and short circuit protection as standard features. The output voltage sequence/tracking features allows the output voltage to track an external signal during startup and shutdown in systems with sensitive powering timing requirements.

This *NBS* series converters excellent choices for today's densely packed systems with limited board space. The wide input and output voltage ranges and user-friendly features are ideal for telecom, datacom, wireless networks, computing, industrial, and automotive applications.

† UL is a registered trademark of Underwriters Laboratory Inc

### Absolute Maximum Ratings

Excessive stresses over these absolute maximum ratings can cause permanent damage to the converter. Also, exposure to absolute maximum ratings for extended periods of time can adversely affect the reliability of the converter. Operation should be limited to the conditions outlined under the Electrical Specification Section.

Parameter	Symbol	Min	Max	Unit
Input Voltage (continuous)	$V_i$	-0.5	38.5	Vdc
Operating Ambient Temperature (See Thermal Consideration section)	$T_o$	-40	85*	°C
Storage Temperature	$T_{stg}$	-55	125	°C

\* For operation above 85°C ambient temperature, please consult NetPower for derating guidance.

### Electrical Specifications

These specifications are valid over the converter's full range of input voltage, resistive load, and temperature unless noted otherwise.

#### Input Specifications

Parameter	Symbol	Min	Typ	Max	Unit
Input Voltage	$V_i$	18	24	36	Vdc
Input Current	$I_{i,max}$	-	-	1.3	A
Quiescent Input Current ( $V_{in} = 24$ , $V_o = 3.3V$ )	$I_{i,Qsnt}$	-	50	70	mA
Standby Input Current	$I_{i,standby}$	-	2	-	mA
Inrush Transient	$I^2t$	-	-	0.5	A <sup>2</sup> s
Input Reflected-ripple Current, Peak-to-peak (5 Hz to 20 MHz, 1 $\mu$ H source impedance)	-	-	20	-	mAp-p
Input Ripple Rejection (120 Hz)	-	-	30	-	dB
Input Turn-on Voltage Threshold	-	-	17	-	V

#### Output Specifications

Parameter	Symbol	Min	Typ	Max	Unit
Output Voltage Set Point Tolerance ( $V_i = 12$ V; $I_o = I_{o,max}$ ; $T_a = 25^\circ\text{C}$ )	-	-2.0	-	2.0	%
Output Voltage Set Point Tolerance (over all conditions)	-	-2.5	-	3.50	%
Output Regulation:					
Line Regulation ( $V_i = 9V$ to $36V$ , $I_o = 1/2$ of load)	-	-	0.2	-	% $V_o$
Load Regulation ( $I_o = I_{o,min}$ to $I_{o,max}$ , $V_i = 24V$ )	-	-	0.3	-	% $V_o$
Temperature ( $T_a = -40^\circ\text{C}$ to $85^\circ\text{C}$ )	-	-	0.2	-	% $V_o$
Output Ripple and Noise Voltage (5 Hz to 20 MHz bandwidth, $V_{in} = 24V$ )	Peak-to-peak -	-	2	-	% $V_o$
	RMS	-	-	1	% $V_o$
External Load Capacitance	-	-	-	2,000	$\mu$ F
Output Current	$I_o$	0	-	3.5	A
Output Power	$P_o$	0	-	18	W
Output Current-limit Trip Point	$I_{o,cli}$	-	170	-	% $I_{o,max}$
Output Short-circuit Current, hiccup mode	-	-	2	-	A
Switching frequency	-	333	370	407	kHz
Voltage Tracking/Sequencing Slew Rate – Power UP	-	-	-	2	V/ms
Voltage Tracking/Sequencing Slew Rate – Power down	-	-	-	1	V/ms

**Output Specifications (continued)**

Parameter	Symbol	Min	Typ	Max	Unit
Efficiency (Vi = 24V; TA = 25°C)	Vo = 5V, Io = 3.5A		87		%
	Vo = 12V, Io = 2A		94		%
Dynamic Response (Vi = 24V; TA = 25°C; Load transient 0.1A/μs)					
Load step from 75% to 100% of full load:					
Peak deviation					mV
Settling time (to 10% band of Vo deviation)					μs
Load step from 100% to 75% of full load:					
Peak deviation					mV
Settling time (to 10% band of Vo deviation)					μs

**General Specifications**

Parameter	Symbol	Min	Typ	Max	Unit
Remote Enable					
Negative Logic:					
Logic Low – Module On	-	-	-	-	-
Logic High – Module Off					
Positive Logic:					
Logic High – Module On	-	-	-	-	-
Logic Low – Module Off					
Logic Low:					
ION/OFF = 1.0mA	VON/OFF	0	-	0.5	V
VON/OFF = 0.0V	ION/OFF	-	-	1.0	mA
Logic High:					
ION/OFF = 0.0μA	VON/OFF	-	-	15	V
Leakage Current	ION/OFF	-	-	50	μA
-					
Turn-on Time (Io = full load, Vo within 1% of setpoint)	-	-	6	-	ms
Calculated MTBF (Bellcore TR-332, 40°C, full load)					10 <sup>6</sup> -hour

## Characteristic Curves

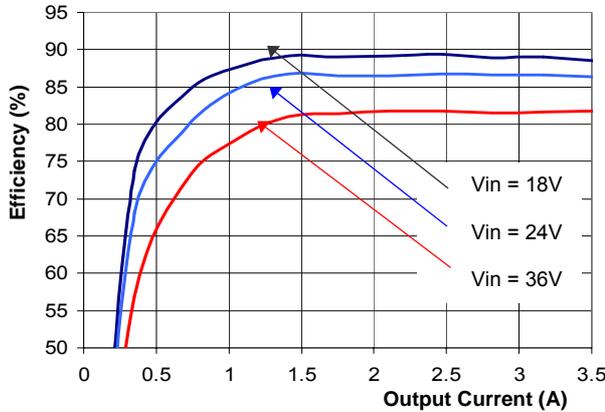


Figure 1(g). Efficiency vs. Load Current (25°C, 5V output)

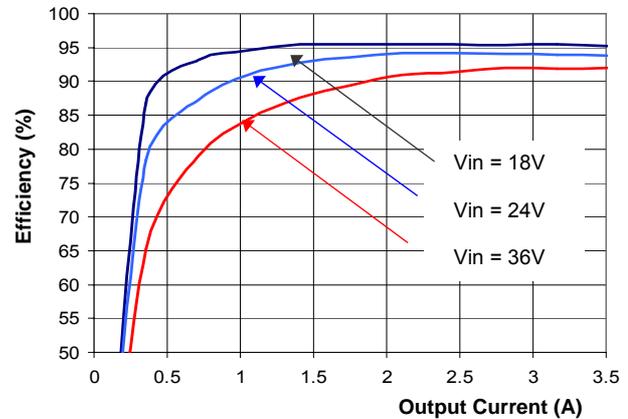


Figure 1(h). Efficiency vs. Load Current (25°C, 12V output)

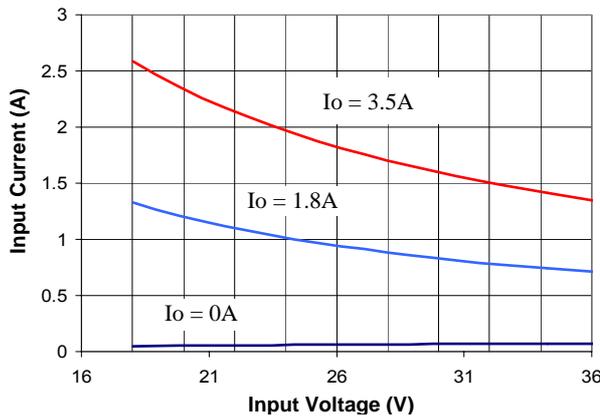


Figure 2. Input Characteristic (12V output)

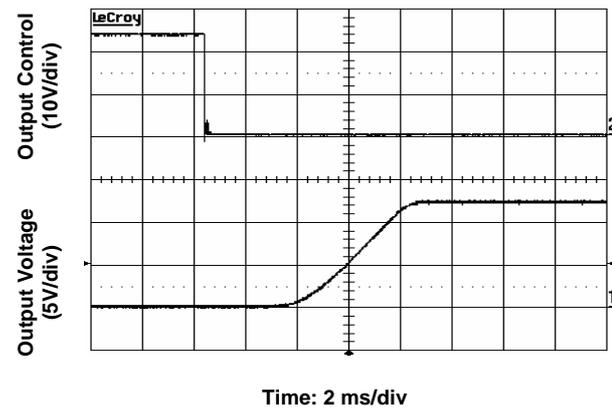


Figure 3. Start-Up from Enable Control Input voltage 24V, Output current 3.5A, output voltage 12V.

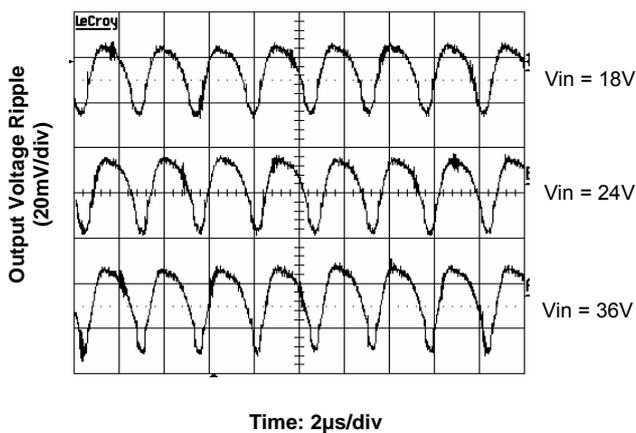


Figure 4. Output Ripple Voltage at 5V, 3.5A Output

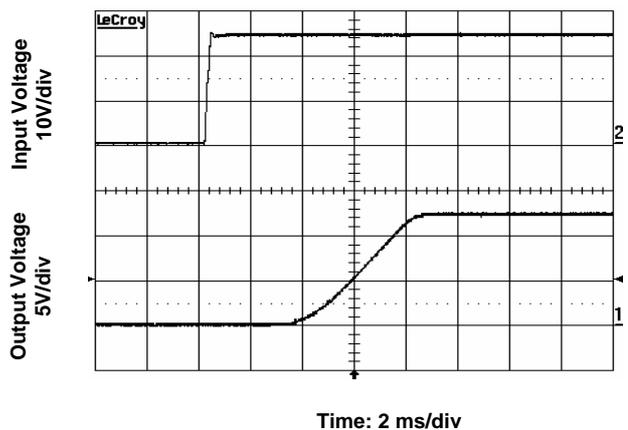


Figure 5. Start-Up from Application of Input Voltage Input voltage 24V, output current 3.5A, output voltage 12V.

## Characteristic Curves

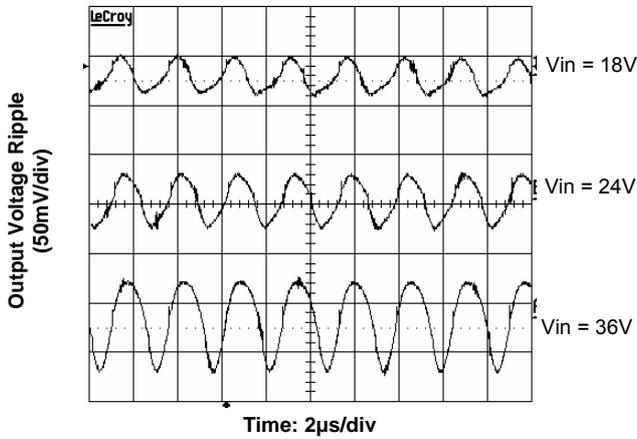


Figure 6. Output Ripple Voltage at 12V, 5A Output

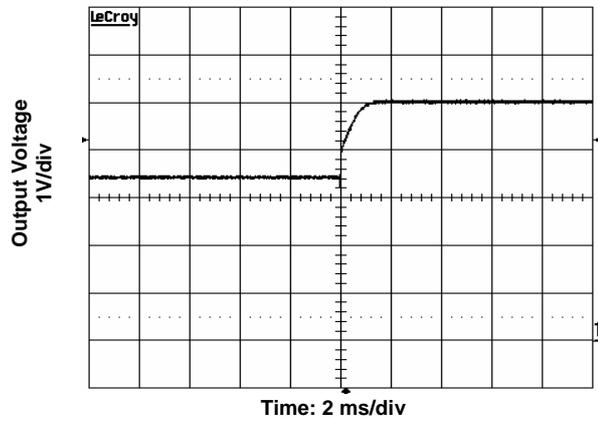


Figure 7. Start-Up with Prebias Input voltage 24V, Output current 0A, Output voltage 5V, Prebias 3.3V

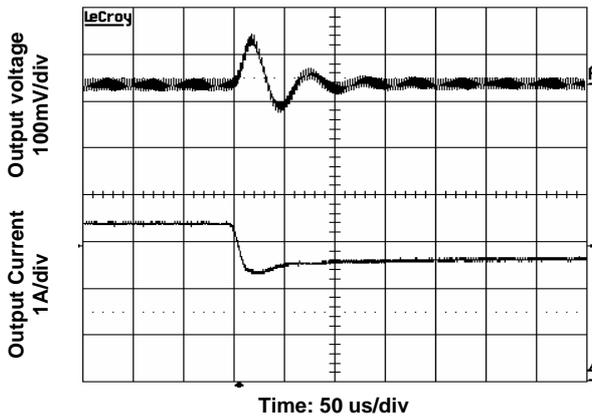


Figure 8. Transient Load Response Input/output voltage 24/12V, Output current 3.5A->1.65A, Slew rate 0.1A/µs.

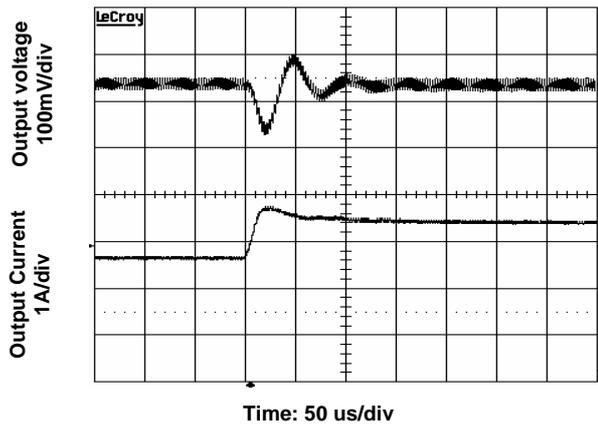


Figure 9. Transient Load Response Input/output voltage 24/12V, Output current 1.65A->3.5A, Slew rate 0.1A/µs .

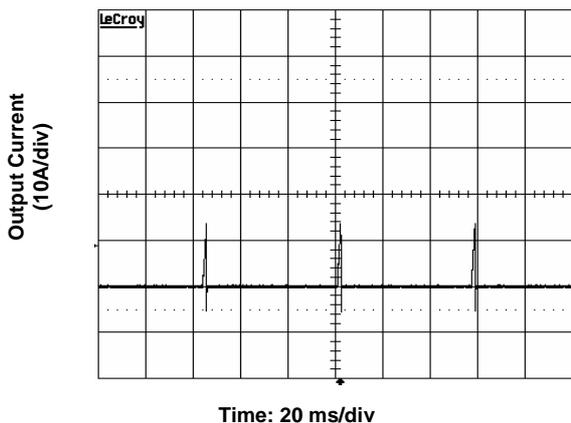


Figure 10. Short Circuit Current.  $V_{in} = 24V$



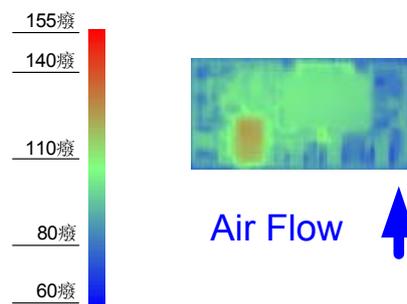


Figure 11. Thermal Image.  $V_{in} = 12V$ , 3.3V/6.5A output, 55°C ambient, 200 LFM

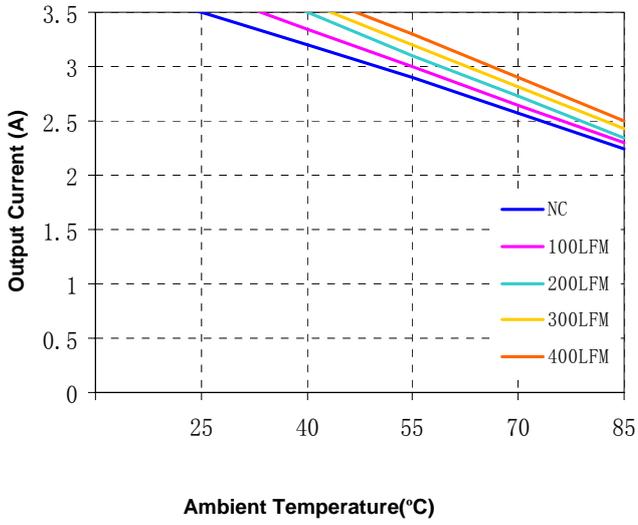

**Figure 12(a). Current Derating Curve for 5V Output (  $V_{in} = 24V$  open frame)**

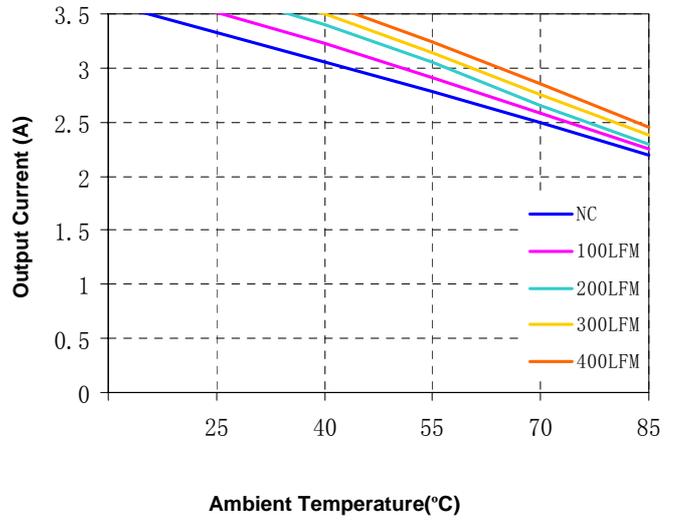

**Figure 12(b). Current Derating Curve for 12V Output (  $V_{in} = 24V$  open frame)**

## Feature Descriptions

### Remote ON/OFF

The converter can be turned on and off by changing the voltage or resistance between the ON/OFF pin and GND. The NBS converters can be ordered with factory selectable positive logic or negative enabling logic.

For the negative control logic, the converter is ON when the ON/OFF pin is at a logic low level, and OFF when the ON/OFF pin is at a logic high level. With positive control logic, the converter is ON when the ON/OFF pin is at a logic high level and OFF when the ON/OFF pin is at a logic low level. The converter is ON no matter what control logic is when ON/OFF pin is left open (unconnected).

Figure 13 is the recommended ON/Off control circuit for positive logic modules, while Figure 14 is for negative logic modules. Recommended value of the pull up resistor  $R_{pull-up}$  is 50K. The maximum allowable leakage current from this pin at logic-high level is 20 $\mu$ A.

The logic-low level is from 0V to 0.5V, and the maximum switch current during logic low is 2mA. The external switch must be capable of maintaining a logic-low level while sinking this current.

### Remote SENSE

The remote SENSE pin is used to sense voltage at the load point to accurately regulate the load voltage and eliminate the impact of the voltage drop in the power distribution path.

The SENSE pin should be connected to the point where regulation is desired. The voltage difference between the output pins must not exceed the operating range of this converter shown in the specification table.

When remote sense is not used, the SENSE pin can be connected to the positive output terminals. If the SENSE pins are left floating, the converter will deliver an output voltage slightly higher than its specified typical output voltage. The OVP (output over-voltage protection) circuit senses the voltage across the output pins, so the total voltage rise should not exceed the minimum OVP setpoint given in the

Specifications Table in operation.

Because the converter does not have remote sense connection for GND, it is important to make sure that the connection resistance and voltage drop between GND pin and the load is small.

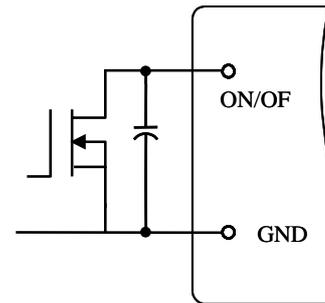


Figure 13 Circuit for Positive Logic Control

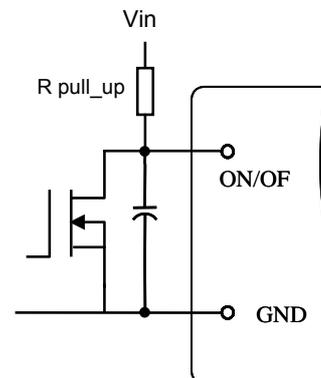


Figure 14 Circuit for Negative Logic Control

### Output Voltage Programming and Adjustment

The output voltage of this converter is preset to 5.021V as a default. Customers can also order 12V or 15V as the preset voltage by indicating the desired voltage in the part number. The output voltage be trimmed up to 15.5V using an external trim resistor. To trim the voltage lower than the preset voltage, an external voltage higher than the nominal voltage has to be applied to the Trim pin.

The trim pin allows the user to adjust the output voltage set point with an external resistor or voltage. If the trim pin is open, the converter outputs preset voltage. If the trim pin is shorted to GND, the converter outputs 15.521V. To program the output voltage, a resistor should be connected between the Trim pin and the GND pin. The output voltage can be adjusted down by changing the value of the external resistor using the equation below:

$$R_{trim} = \left( \frac{10.5}{\Delta} - 1 \right) (k\Omega)$$

Where  $\Delta = V_o - V_{onom}$ ,  $V_{onom} = 5.021$  as a default, or is the preset voltage ordered.

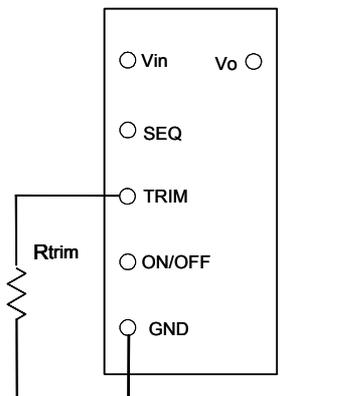


Figure 15 Circuit to Trim Output Voltage

The circuit configuration for trim operation is shown in Figure 15. Because NBS converters use GND as the reference for control, Rtrim should be placed as close to GND pin as possible, and the trace connecting GND pin and Rtrim should not carry significant current, to reduce the effect of voltage drop on the GND trace/plain on the output voltage accuracy.

### Input Under-Voltage Lockout

This feature prevents the converter from turning on until the input voltage reaches about 17V.

### Output Over-Current/Short-Circuit Protection

This converter is designed to operate within 3.5A of output current and 18W of output power if the output voltage is higher than 7V. The converter turns off when the load current exceeds the current limit. If the over-current or short circuit condition persists, the converter will operate in a hiccup mode (repeatedly trying to restart) until the over-current condition is cleared.

### Thermal Shutdown

The converter utilizes the thermal protection feature of the controller IC to perform over temperature protection. When temperature at TMP1 (shown in Fig. 16) reaches 140°C, the converter will shutdown. The converter will resume operation after the converter cools down. However, in practical application, it is strongly recommended that proper cooling should be provided and verified. The Thermal shutdown feature should not be considered as a guarantee for survival under over stress conditions beyond its rating.

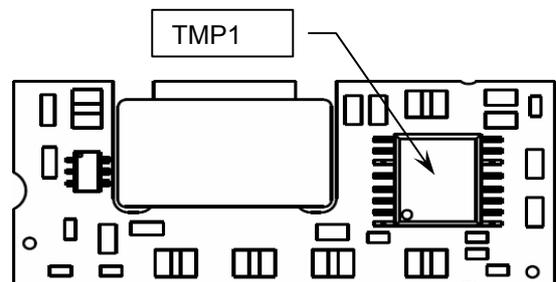


Figure 16. **NBS3 Bottom View** — Temperature Monitoring Point TMP1 for Thermal Shutdown

### Voltage Tracking/Sequencing

An optional voltage tracking/sequencing feature is available with this converter for output voltage up to 8V. This feature is compatible with the "Voltage Sequencing" feature (DOSA) or the "Voltage Tracking" feature (POLA) seen in industry standards. If this feature is not used, the corresponding SEQ pin should be left open, or tied to a voltage higher than the output voltage but less than 10V.

The tracking feature is not available when output voltage is higher than 8V.

This feature basically forces the output of the converter to follow the voltage at the SEQ pin until it reaches the setpoint during startup, or is completely shutdown during turnoff. The converter's output voltage is controlled to be the same magnitude as the voltage on the SEQ pin, on a 1:1 basis. When using this function, one should pay careful attention to the following aspects:

- 1). This feature is intended mainly for startup and shutdown sequencing control. In normal operation, the voltage at SEQ pin should be maintained higher than the required output voltage, or the SEQ pin is left unconnected;
- 2). The input voltage should be valid for this feature to work. During startup, it is recommended to have a delay of at least 10 ms between the establishment of a valid input voltage, and the application of a voltage at the SEQ pin;
- 3). The ON/OFF pin should be in "Enabled" state when this function is effective.
- 4). The converter's pre-bias startup is affected by this function. The converter will still be able to start under a pre-bias condition, but the output voltage waveform will have a glitch during startup.

The tracking feature is not available when output voltage is higher than 8V.

## Design Considerations

### Input Source Impedance and Filtering

The stability of the NBS3 converters, as with any DC/DC converter, may be compromised if the source impedance is too high or too inductive. It's desirable to keep the input source AC impedance as low as possible. To reduce switching frequency ripple current getting into the input circuit (especially the ground/return conductor), it is desirable to place some low ESR capacitors at the input. Ceramic capacitors of at least 10uF total capacitance are recommended. Due to the existence of inductance (such as the trace inductance, connector inductance, etc) in the input circuit, possible oscillation may occur at the input of the converter. Because the relatively high input current of low input voltage power system, it may not be practical or economical to have separate damping or soft start circuit in front of POL converters. We recommend to use a combination of ceramic capacitors and Tantalum/Polymer/Aluminum capacitors at the input, so the relatively higher ERS of

Tantalum/Polymer capacitors can help damp the possible oscillation between the ceramic capacitors and the inductance.


Similarly, although the converter is designed to be stable without external capacitor at the output, some low ESR capacitors at the output may be desirable to further reduce the output voltage ripple or improve the transient response. Again, a combination of ceramic capacitors and Tantalum/Polymer/Aluminum capacitors usually can achieve good results.

### Safety Considerations

To meet safety requirements of the system, the converter shall be used in accordance with the requirements of end-use equipment safety standards. If a fuse is to be used at the input, it's recommended to use a fast blow fuse with adequate current rating.

The converter's output meets SELV requirements if its input meets SELV requirements.

### Thermal Considerations

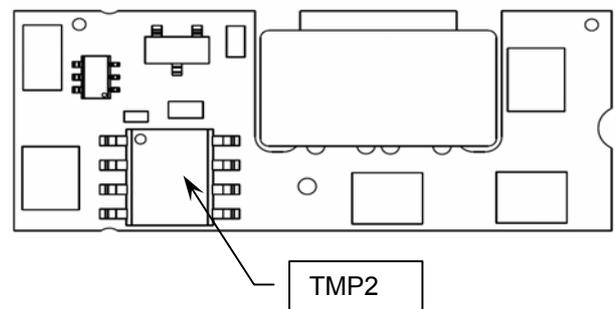

**Figure 17. NBS3 Top View — Temperature Monitoring Point TMP2 for Derating Operation**

The NBS3 converters can operate in various thermal environments. Due to the high efficiency and optimal heat distribution, these converters exhibit excellent thermal performance. Proper cooling in the end system can be verified by monitoring the temperature of the key components. Figure 17 shows recommended temperature monitoring points. The temperature at these locations should not exceed 120 °C continuously.

The maximum allowable output power of any power converter is usually determined by the electrical design and the maximum operating temperature of its components. The NBS3 converters have been tested comprehensively under various conditions to generate the derating curves with consideration for long term reliability.

Thermal derating curves are highly influenced by derating guide, the test conditions and test setup, such as test temperatures, the interface method between the converter and the test fixture board, spacing and construction (especially copper weight, holes and openings) of the fixture board and the spacing board, temperature measurement method, and the ambient temperature measurement point. The thermal derating curves in this datasheet are obtained by thermal tests in a wind-tunnel at 25°C, 55°C, 70°C, and 85°C. The converter's power pins are soldered to a 2-layer test fixture board through 18 AWG wires. The space between the test board and a PWB spacing board is 1". Usually, the end system

board has more layer count, and has better thermal conduction than our test fixture board. For thermal considerations specific to your application environment, please contact NetPower's technical support team for assistance.

**Heat Transfer without a Baseplate or Heatsink**

Convection heat transfer is the primary cooling means for converters without a baseplate. Therefore, airflow speed is important for any intended operating environment. Increasing the airflow over the converter enhances the heat transfer via convection.


Figures 12 (a) through (b) show the current derating curves under nominal input voltage for a few output voltages. To maintain long-term reliability, the module should be operated within these curves in steady state. Note: the natural convection condition can be measured from 0.05 - 0.15 m/s ( 10-30 LFM).

**NBS Converter Part Numbering System:**

NBS	3	000	N	04	S	1	5
Series Name	Input Voltage	Output Voltage	Enabling Logic	Output Current	Pin Length	Electrical Option	Mechanical Option
NBS	3: 24V nom. (20 – 36V)	000 = adjustable (5-15.5V)	P: Positive N: Negative	04 = 3.5A	S: SMT	0: None 1: Voltage tracking	0: None 5: Pb-free parts

\*: fixed output models are available as semi-custom products.

The above example denotes an 3.5A output module in Pb-free (RoHS compliant) with negative enabling logic, voltage tracking.

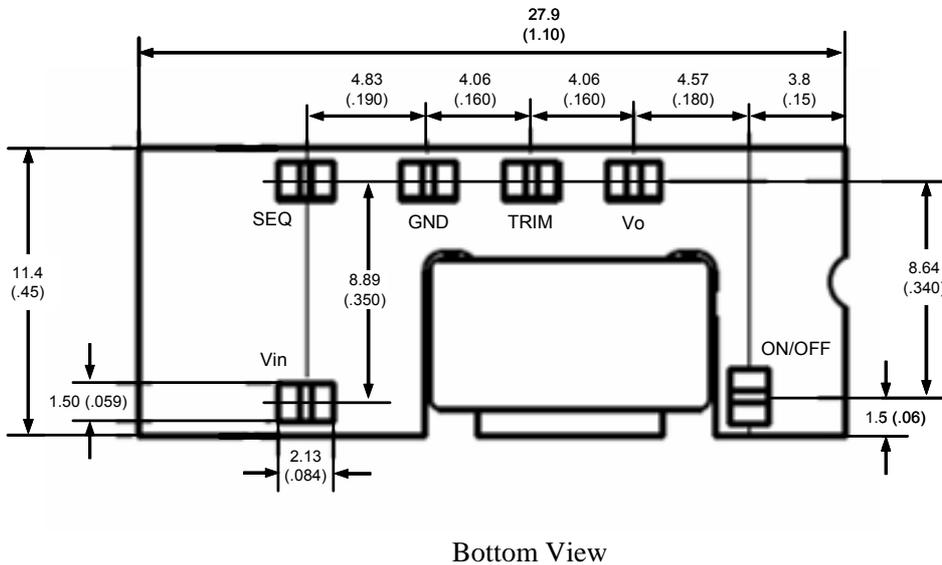**Mechanical drawing dimensions in mm(inch)**

**Notes**

- 1) All dimensions in mm (inches). Tolerances:  
 $x \pm .5 (.xx \pm 0.02)$   
 $.xx \pm .25 (.xxx \pm 0.010)$
- 2) All pins are coated with gold finish
- 3) Weight: 0.25oz(7g) open frame converter
- 4) Workmanship: Meet or exceeds IPC-A-610 Class II

**For more information, please contact:**


**NetPower** Technologies, Inc.  
 Toll Free: 866-NETPOWER (866-638-7693)  
 Local Phone: 972-560-0500  
 Fax: 972-560-0210  
 E-mail: [sales@netpowercorp.com](mailto:sales@netpowercorp.com)  
[www.netpowercorp.com](http://www.netpowercorp.com)  
 1680 Prospect Drive #200, Richardson, TX 75081

**Warranty**

NetPower offers a two (2) year limited warranty. Complete warranty information is listed on our web site or is available upon request. Information furnished by NetPower is believed to be accurate and reliable. However, no responsibility is assumed by NetPower for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of NetPower.